



## DESCRIPTION

The SR-C8L is a 2-way line array speaker featuring wave front control technology which creates a sound field with high sound clarity and uniform sound pressure.  
Recommended digital speaker processor is the DP-SP3 (option).  
It can be converted into the bi-amplifier drive system by changing the internal connection.

## SPECIFICATIONS

|                         |                                                                                                                                                            |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Enclosure               | Bass-reflex type                                                                                                                                           |
| Power Handling Capacity | Continuous program: 360 W (single-amp mode)<br>Low: 360 W, High: 180 W (bi-amp mode)                                                                       |
| Rated Impedance         | 16 $\Omega$ (single-amp mode)<br>Low: 16 $\Omega$ , High: 16 $\Omega$ (bi-amp mode)                                                                        |
| Sensitivity             | 98 dB (1 W, 1 m) (single-amp mode)<br>Low: 95 dB (1 W, 1 m), High: 110 dB (1 W, 1 m) (bi-amp mode)                                                         |
| Frequency Response      | 65 Hz – 20 kHz (when recommended parameters are applied by the optional DP-SP3)                                                                            |
| Crossover Frequency     | 1.6 kHz (when recommended parameters are applied by the optional DP-SP3)                                                                                   |
| Directivity Angle       | Horizontal: 110°, Vertical: 5°                                                                                                                             |
| Speaker Component       | Low frequency: 20 cm (8") cone-type<br>High frequency: Wave front control horn 110° (horizontal) $\times$ 5° (vertical)<br>+ compression driver $\times$ 2 |
| Input Connector         | M4 screw terminal, distance between barriers: 10 mm (0.39")<br>and Neutrik NL4MPXX $\times$ 2                                                              |
| Finish                  | Enclosure: Plywood, black, urethane paint<br>Front grille: Punched steel plate, black, paint                                                               |
| Dimensions              | 526.6 (W) $\times$ 293 (H) $\times$ 296 (D) mm (20.73" $\times$ 11.54" $\times$ 11.65")                                                                    |
| Weight                  | 17 kg (37.48 lb)                                                                                                                                           |
| Accessory               | M8 connection bolt $\times$ 4                                                                                                                              |
| Option                  | Cluster bracket: SR-CL8<br>Rigging frame: SR-RF8<br>Tilt joint bracket: SR-TP8<br>Digital speaker processor: DP-SP3                                        |

## APPEARANCE

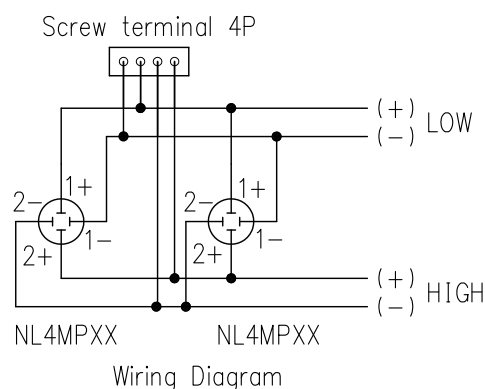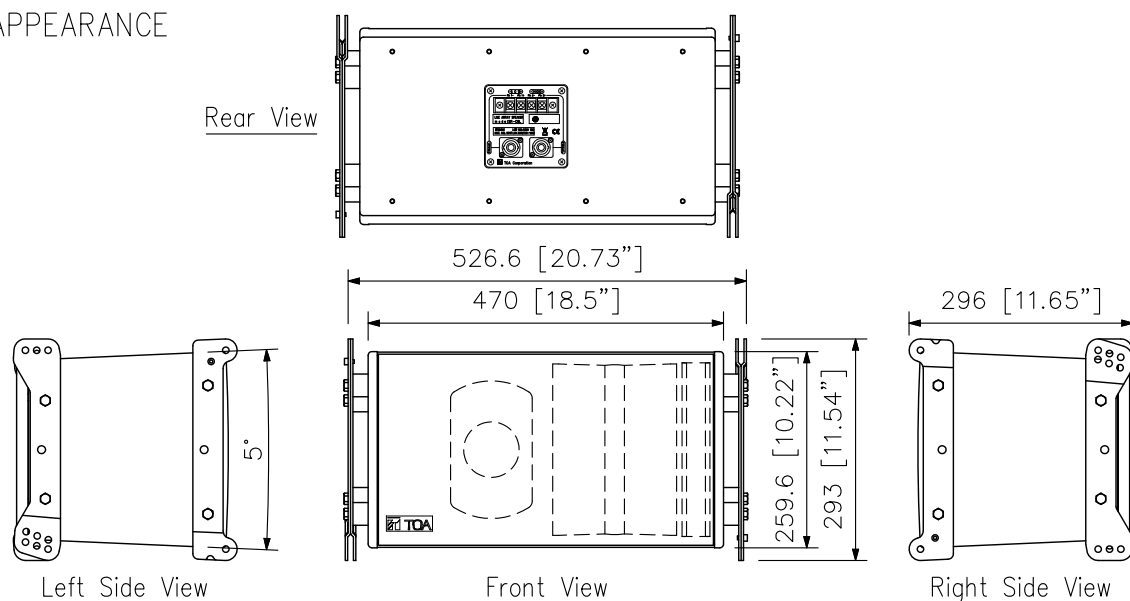

UNIT:mm SCALE:1/10