

SPEAKER RIGGING FRAME


HY-PF1W/(EU)

The HY-PF1W is used exclusively to suspend the HX-5 speaker system from the ceiling. The FB-120 series Subwoofer can be suspended using this frame and the frame's supplied mounting brackets. This bracket is designed for indoor use.

■ SPECIFICATIONS

Finish	Steel plate, white, semi-gloss paint
Dimensions	550 (W) × 50 (H) × 512 (D) mm
Weight	3.6 kg
Accessory	Subwoofer mounting bracket4, Bracket fixing bolt (M8) with washer4,
,	Subwoofer mounting bolt (M8) with washer …4,
	Bracket fixing nut (M8)4, Bracket fixing washer (M8)4

■ APPEARANCE




Hanging the HX-5W

Holes A are used for hanging between the HY-PF1W and the HX-5W, and also between the HY-PF1W and the ceiling (3-point hanging).

Hanging the HX-5W with the FB-120W mounted Holes A are used for hanging between the HY-PF1W and the HX-5W (3-point hanging), and Holes B for hanging between the HY-PF1W and the ceiling (4-point hanging).

<u>Hanging the FB-120W</u>

Holes B are used for hanging between the HY-PF1W and the ceiling (4-point hanging).

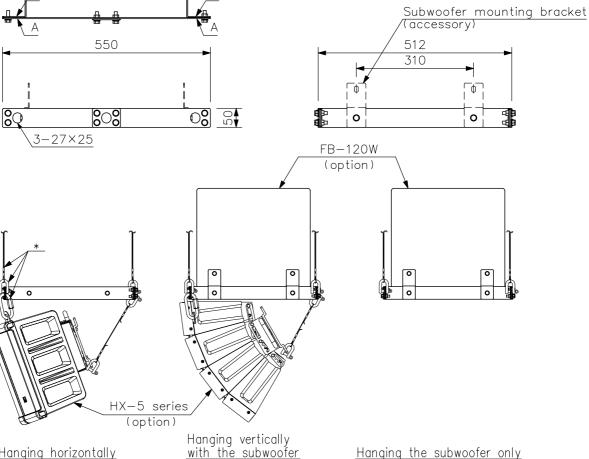

with the subwoofer Example for HX-5W and FB-120W mounting

(scale :1/15)

* Note: Wires, anchor shackles, and carabiners necessary for hanging are not supplied with the product.

UNIT: mm

Hanging horizontally

SCALE: 1/10